

ROBUS[®]

QUALITY PRODUCTS BY LED GROUP

2W Mains Voltage

Cabinet Light

R2CLED240

Please read instructions before commencing installation and retain for future reference.



Specification:

220V-240V 2W cabinet light in round suitable for surface or recessed mounting

No need for driver

Protection against electric shock: Class II

Lamp type: 2W LEDs
Colour temperature: 3000-3500K
Dimensions:

Surface: Diameter Ø64mm, depth 32mm

Recessed: Diameter Ø64mm, depth 18mm

Temperature range: $-20^{\circ}\text{C} < t_a < 40^{\circ}\text{C}$

Supply: 220-240VAC

Cut out size: Ø45mm, Depth min. 20mm

Weight: 0.07Kg.


Can be surface mounted or semi recessed---remove outer cowl for semi recessed option

Complete with 1.5m Cable


Warning! To prevent overheating, the fitting must not be covered by thermal insulation

Complies with EN60598 (BS4533)

Dimension:

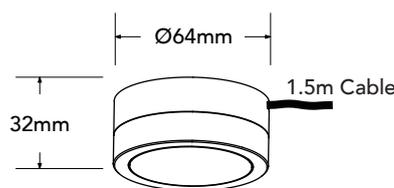

Surface

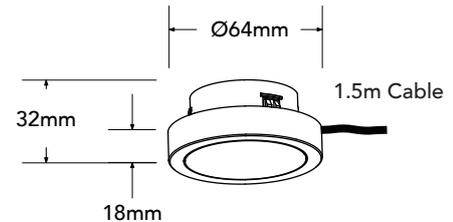

Recessed

Information for the Product user

1. Please note the requirement to dispose of Waste Electrical & Electronic Equipment separately from household waste (WEEE marked with crossed out wheelie bin symbol).
2. Please consider your role in contributing to re-use and recycling by returning this product at end of life to a collection centre for waste electrical equipment or a Civic Amenity site, or to a retail outlet from which you are purchasing a replacement.
3. This equipment may contain substances that are hazardous to health and the environment if disposed of carelessly. It is important that it is separated from normal household waste and recycled in the WEEE chain
4. The "crossed out wheelie bin symbol" on a product indicates this equipment must not be disposed of in normal household waste, but should be disposed of according to local WEEE regulations

The Installation must be carried out by an electrician

LED Group
Western Retail Park
Nangor Road
Dublin 12
Ireland

Tel: +353 1 7099000
Fax: +353 1 7099060
Email: info@led.ie
Website: www.led.ie



Installation diagram:

!Electrical products can cause death or injury, or damage to property. This product must be installed only by a competent electrician.

Ensure mains supply is switched off

Note: for recessed installation, make $\text{Ø}45\text{mm}$ cut-out in mounting surface and push the luminaire into cut-out, discarding the outer cowl.

This fitting has no user serviceable parts. If any part is damaged, disconnect from mains and discontinue use.

Surface mounting:




Fig 1. Remove outer cowl from fitting, Fix cowl to surface with screw through mounting tab

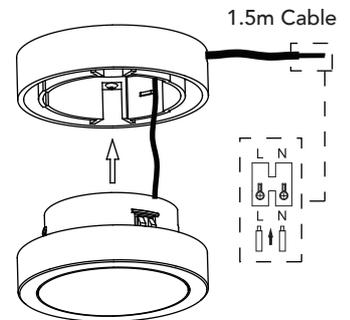


Fig 2. Connect main supply to the luminaire


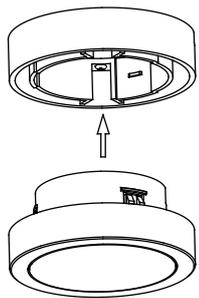


Fig 3. Push and rotate luminaire into the cowl.

Recessed mounting

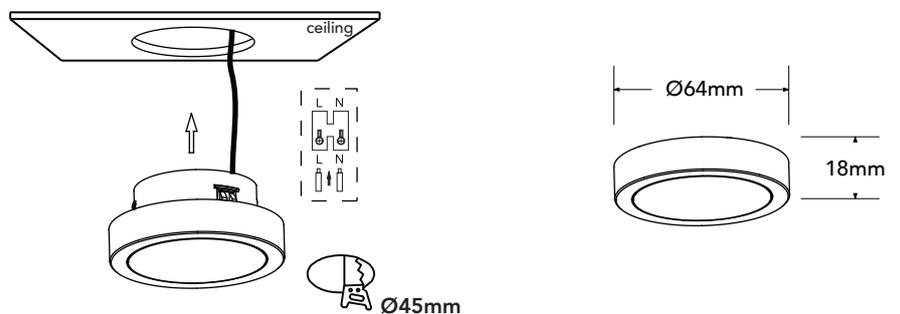

Remove outer cowl from fitting, then connect main supply to the luminaire. Offer cowl up to cut-out

The Installation must be carried out by an electrician