


1887 Rodio LED - asymmetric



Housing: in die-cast aluminium with cooling fins.
Reflector: in PMMA, highly resistant to temperature and UV radiation.
Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.
Coting: powder-coated with graphite grey polyester resin, resistant to corrosion and saline environments.

Equipment: complete with mounting bracket and graduated scale goniometer which allows for accurate pointing; external connector for quick installation. Safety insulating switch to cut off power during maintenance. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Insulation piercing connector for quick installation with no need to open the fixture. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: for Class II fixtures, protection up to 10KV. Acetic acid salt spray coating pursuant to standard UNI EN ISO 9227 "Corrosion Tests in Artificial Atmosphere". Power factor: >= 0.9

Luminous flux maintenance 80%: 80000h (L80B20)
LED 4000K - 7560lm - CRI 80 - 350mA - 48W - Low flicker - Surge protector 6/8Kv
LED 4000K - 11400lm - CRI 80 - 530mA - 75W - Low flicker - Surge protector 6/8Kv
LED 4000K - 17100lm - CRI 80 - 530mA - 112W - Low flicker - Surge protector 6/8Kv
LED 4000K - 21200lm - CRI 80 - 700mA - 156W - Low flicker - Surge protector 4/8Kv
Wind surface: L:390cm² F:1420cm².

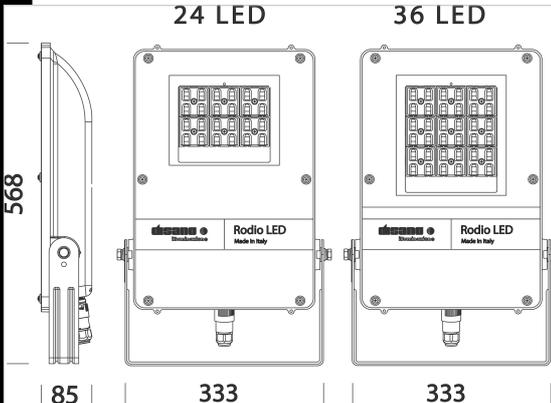

Code	Gear	Kg	Watt	Base	Lamps	Colour
414754-00	CLD CELL	5.99	LED white 48W		7560lm @ 350mA-4000K-CRI 80	GRAPHITE
414755-00	CLD CELL	5.99	LED white 75W		11400lm @ 530mA-4000K-CRI 80	GRAPHITE
414756-00	CLD CELL	6.17	LED white 112W		17100lm @ 530mA-4000K-CRI 80	GRAPHITE
414757-00	CLD CELL	6.09	LED white 156W		21200lm @ 700mA-4000K-CRI 80	GRAPHITE

Accessories




- 333 pole mounting diam.60



- 334 pole mounting diam. 76



- 350 protection guard

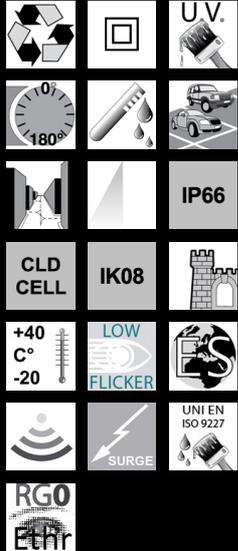

Download

DXF 2D
- 1887.dxf

Montaggi
- rodioled.pdf