

3275 Mini Stelvio - street type

Housing and cover: in die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins are integrated into the cover. Pole connection: in die-cast aluminium and with gaskets to secure the frame according to different inclinations. Adjustable ranges: between 0° and 15° for side mount; and between 0° and 10° for mast-top mounting. Inclination pace: 5°. Suited for poles with a diameter 63-60mm. Diffuser: clear, tempered glass, 4 mm thick, resistant to thermal shock and impacts (UNI-EN 12150-1 : 2001). Coating: polyester resin for powder coating, resistant to corrosion and saline environments. Standard supply: Automatic temperature control inside the device with automatic resetting. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: for Class II fixtures, protection up to 10KV. Equipment: complete with IP67 airtight connector for mains connection. Supplied with double insulation switch that cuts off electricity when the cover is opened. Energy-saving: the possibility to choose the correct drive current for LEDs will allow you to have the right power under specific design conditions, and also help you deal with maintenance and retrofitting problems. Using a lower current will improve the efficiency of fixtures and therefore increase energy savings, whilst a higher current will result in a higher light flux so that you can reduce the number of fixtures. Optics: in PMMA, highly resistant to temperature and UV radiation.

LED: Latest generation LED technology, 4000K - 700mA - 6792/10188/13584lm - 47/70/94W CRI>70 (350mA 23W - 3696lm, 34W - 5544lm, 46W - 7392lm)


Ta-30+40°C life 80%: 80.000h (L80B10).

Power factor >0.9

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Upon request:

- with power supply 1-10 V dimmable with subcode 12.
 - with power supply DIG dimmable with subcode 0041.
 - with virtual midnight subcode 30.
 - power line carrier remote control systems subcode 0078.
 - Acetic acid salt spray coating pursuant to standard UNI EN ISO 9227 "Corrosion Tests in Artificial Atmosphere".
- Wind surface: L:139cm² F:400cm².

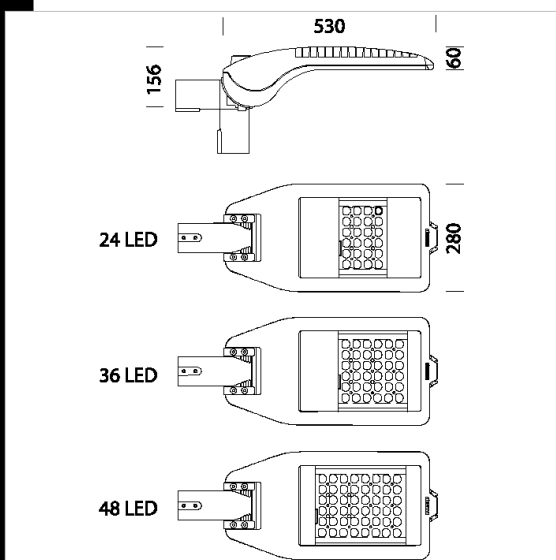

Download

DXF 2D
- 3275.dxf

3DS

- disano_3275_ministelvio_24led.3ds
- disano_3275_ministelvio_36led.3ds
- disano_3275_ministelvio_48led.3ds

3DM

- disano_3275_ministelvio_48led.3dm
- disano_3275_ministelvio_24led.3dm
- disano_3275_ministelvio_36led.3dm

Montaggi

- stelvio_ministelvio.pdf
- stelvio_ministelvio.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
330360-00	CLD CELL	7.56	LED white 47W		6792lm @ 700mA-4000K-CRI70	ANTHRACITE
330361-00	CLD CELL	7.94	LED white 70W	-	10188lm @ 700mA-4000K-CRI70	ANTHRACITE
330362-00	CLD CELL	8.04	LED white 94W	-	13584lm @ 700mA-4000K-CRI>70	ANTHRACITE
330470-00	CLD CELL	8.08	LED white 23W	-	3696lm @ 350mA-4000K-CRI70	ANTHRACITE
330471-00	CLD CELL	8.08	LED white 34W	-	5544lm @ 350mA-4000K-CRI70	ANTHRACITE
330472-00	CLD CELL	8.24	LED white 46W	-	7392lm @ 350mA-4000K-CRI70	ANTHRACITE
330473-00	CLD CELL	7.96	LED white 36W	-	5400lm @ 530mA-4000K-CRI>70	ANTHRACITE
330474-00	CLD CELL	8.56	LED white 54W	-	8390lm @ 530mA-4000K-CRI>70	ANTHRACITE
330475-00	CLD CELL	8.14	LED white 72W	-	10800lm @ 530mA-4000K-CRI>70	ANTHRACITE

Accessories



- 504 - Single arm



- 508 - Double arm

Posts



- 1508 fluted pole ø120 with base



- 1509 fluted pole ø120



- 1481 tapered steel lighting pole to be buried



- 1480 tapered steel lighting pole with base



- 1494 pole with base



- 1492 poles to be sunk into the ground