



ALASKA T8

IP65 fittings for T8 lamps



APPLICATIONS

- Industry, garages and workshops
- Changing rooms
- Non-emergency versions rated to minus 25°C

CONSTRUCTION

- ABS base. PC controller and clips
- Supplied complete with mounting kit

TECHNICAL DETAILS

- For T8 lamps.
- Supplied excluding lamps
- ENEC standard HF control gear


OPTIONS

EMERGENCY Maintained 3 hours available in all versions except 8W. Add suffix M3.

DIMMING Add suffix DA, SD or CF as required.

ACCESSORIES For spare controllers, clips (PC and SS) and external sensors see page 155.

ORDER CODE	DESCRIPTION
NAK118/HF	ALASKA 1X18W T8 HF NON-CORROSIVE NO LAMP
NAK136/HF	ALASKA 1X36W T8 HF NON-CORROSIVE NO LAMP
NAK158/HF	ALASKA 1X58W T8 HF NON-CORROSIVE NO LAMP
NAK170/HF	ALASKA 1X70W T8 HF NON-CORROSIVE NO LAMP
NAK218/HF	ALASKA 2X18W T8 HF NON-CORROSIVE NO LAMP
NAK236/HF	ALASKA 2X36W T8 HF NON-CORROSIVE NO LAMP
NAK258/HF	ALASKA 2X58W T8 HF NON-CORROSIVE NO LAMP
NAK270/HF	ALASKA 2X70W T8 HF NON-CORROSIVE NO LAMP

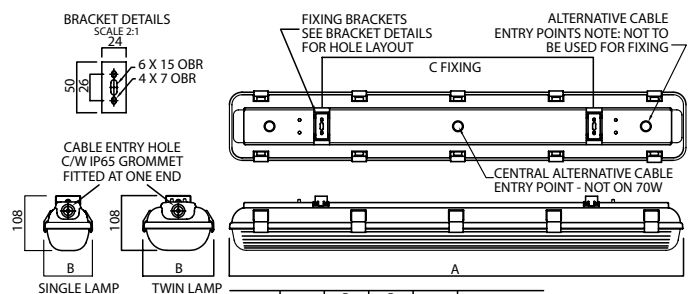

SIZE	A	B SINGLE	B TWIN	C	NO. OF CLIPS
18W	658	96	140	400	6
36W	1266	96	140	900	10
58W	1566	96	140	900	12
70W	1835	106	166	1115	12