BENTLEY

High-output LED panel

APPLICATIONS

- Offices
- Retail
- High-ceilinged areas and projects that require a higher than average lumen output or lux level

TECHNICAL DETAILS

- 32W nom., 33.4W act., 4,020 lm, 120 l.lm/c.W
- CRI >80
- CCT 5000K
- Low-flicker Osram driver

OPTIONS

EMERGENCY Maintained 3 hours available. Suffix M3.

DIMMING Add suffix DA, SD or CF as required.

CONSTRUCTION

- Steel body with white semi-gloss powder coated finish
- For 15-24mm exposed T ceilings
- Opal polycarbonate diffuser panels
- Class II driver on flying lead
- Weight 3.0kg

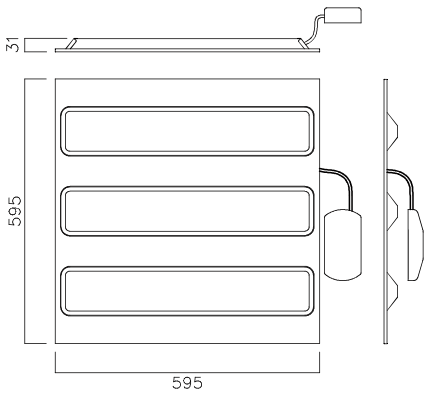

ORDER CODE	DESCRIPTION
NBT32LED/66/850	BENTLEY LED 32W PANEL 600X600 COL850
NBT32LED/66/M3/850	BENTLEY LED 32W PANEL 600X600 +M3 COL850