



220-240V  
50/60 HzIK  
07IP  
66

Industrial luminaire for LED light sources.

**TECHNICAL DATA****Mounting:** surface mounted, in the ceiling, with mounting frame (sold separately), suspended, on chains (on request)**Body:** high pressure die-cast aluminum**Colour:** gray**Diffuser:** tempered glass**ELECTRICAL DATA****Power supply efficiency:** >95%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED, DALI**Electrical connection:** 3-pole connector**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**GENERAL DATA****Lifetime (L70B50):** 60 000 h**Lifetime (L80B10):** 50 000 h**Lifetime (TM21 L90B10):** 40 000 h**Additional information:** Ball impact resistance**Other remarks:** Beam angle: 100°**Warranty:** 3 years**Application:** warehouses, logistics centers, industrial facilities, sport facilities, roofing

Code	Replacement of conventional technology [W]	Type of equipment	Power LED	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	Operating temperature range [°C]
<b>Type: Standard luminaire</b>										
300092.00067	150W MH (180W)	ED	100	111	14500	13600	123	4000	≥80	-30 ... +35
300092.00052	250W MH (300W)	ED	145	159	21000	19800	125	4000	≥80	-30 ... +40
300092.00051	250W MH (300W)	ED	177	194	25500	23800	123	4000	≥80	-30 ... +40
300092.00091	150W MH (180W)	DALI	100	107	14500	13600	127	4000	≥80	-30 ... +45
300092.00092	250W MH (300W)	DALI	145	156	21000	19800	127	4000	≥80	-30 ... +45
300092.00093	250W MH (300W)	DALI	177	192	25500	23800	124	4000	≥80	-30 ... +40
<b>Type: Luminaires for outdoor installation without roof</b>										
300092.00117	150W MH (180W)	ED	100	111	14500	13600	123	4000	≥80	-30 ... +35
300092.00118	250W MH (300W)	ED	145	159	21000	19800	125	4000	≥80	-30 ... +40
300092.00119	250W MH (300W)	ED	177	194	25500	23800	123	4000	≥80	-30 ... +40
300092.00120	150W MH (180W)	DALI	100	107	14500	13600	127	4000	≥80	-30 ... +45
300092.00121	250W MH (300W)	DALI	147	156	21000	19800	127	4000	≥80	-30 ... +45
300092.00122	250W MH (300W)	DALI	177	192	25500	23800	124	4000	≥80	-30 ... +40

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
<b>Type: Standard luminaire</b>					
300092.00067	515 345 90	430	30	1	6.5
300092.00052	515 345 90	430	30	1	6.5
300092.00051	515 345 90	430	30	1	6.5
300092.00091	515 345 90	430	30	1	6.5
300092.00092	515 345 90	430	30	1	6.5
300092.00093	515 345 90	430	30	1	6.5
<b>Type: Luminaires for outdoor installation without roof</b>					
300092.00117	515 345 90	430	30	1	6.5
300092.00118	515 345 90	430	30	1	6.5

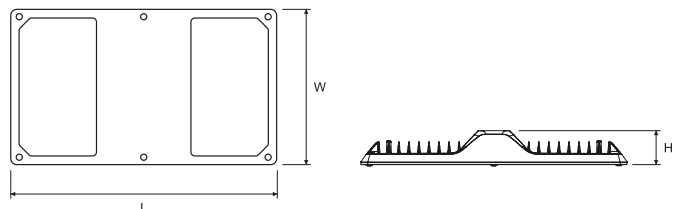

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
<b>Type: Luminaires for outdoor installation without roof</b>					
300092.00119	515 345 90	430	30	1	6.5
300092.00120	515 345 90	430	30	1	6.5
300092.00121	515 345 90	430	30	1	6.5
300092.00122	515 345 90	430	30	1	6.5

## OTHER PICTURES



## ACCESSORIES



150020.00821

Adjustable mounting bracket

150020.00957

Adjustable mounting bracket for mounting without roof




150021.00917

Frame for recessed mounting

150021.00941

Frame for recessed mounting without roof




150020.00824

Bracket for surface mounting

150020.00956

Bracket for surface mounting without roof

## LIGHT BEAM CURVES

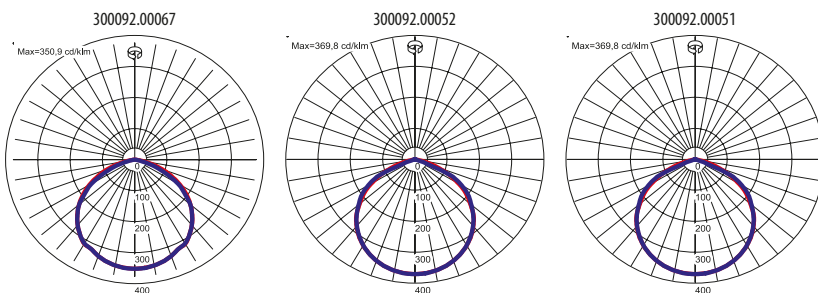

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)