

MEMPHIS 2D

IP65 square polycarbonate fittings with 2D lamps



AVAILABLE WITH MICRO-WAVE OCCUPANCY SENSOR FITTED TO GEAR TRAY



APPLICATIONS

- For commercial interior or exterior use in corridors, entrances and porches, on steps and building perimeters

CONSTRUCTION

- Polycarbonate base and cover

TECHNICAL DETAILS

- 2 wattages available:
 - 16W and 28W with cold-start HF gear, not suitable for frequent switching (e.g. with a sensor)
- Supplied with colour 840 lamp

OPTIONS

EMERGENCY Maintained 3 hours available on 28W version only, using Mackwell module. Suffix M3.


DIMMING Dim-to-10% (corridor function) available. Suffix CF.

SENSORS Available with micro-wave occupancy sensor fitted to gear tray and warm-start gear. Suffix MW. Even with warm-start gear frequent switching will shorten 2D lamp life. **Consider using the LED version.**

PHOTO-CELL All versions except MW available with dusk-dawn photo-cell fitted. Add suffix PEC.

DIFFUSER Prismatic (P) as listed and illustrated. For opal, replace P with O.

BASE Black (BK) or white (WH) both available, as listed.

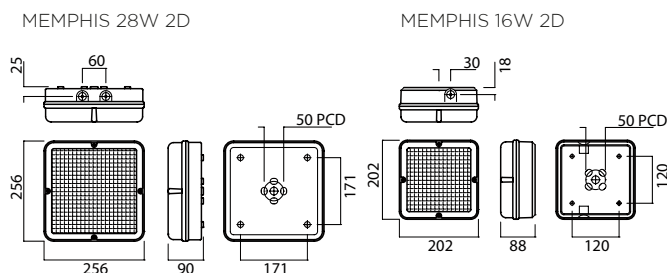

| ORDER CODE | DESCRIPTION |
|-------------------------|---|
| NMM16/2D/HF/WH/P/840 | MEMPHIS 16W2D HF IP65 SQU WH+PRISM+LAMP |
| NMM16/2D/HF/BK/P/840 | MEMPHIS 16W2D HF IP65 SQU BLK+PRISM+LAMP |
| NMM28/2D/HF/WH/P/840 | MEMPHIS 28W2D HF IP65 SQU WH+PRISM+LAMP |
| NMM28/2D/HF/WH/P/M3/840 | MEMPHIS 28W2D HF IP65 SQU WH+PRISM+M3+LAMP |
| NMM28/2D/HF/BK/P/840 | MEMPHIS 28W2D HF IP65 SQU BLK+PRISM+LAMP |
| NMM28/2D/HF/BK/P/M3/840 | MEMPHIS 28W2D HF IP65 SQU BLK+PRISM+M3+LAMP |