

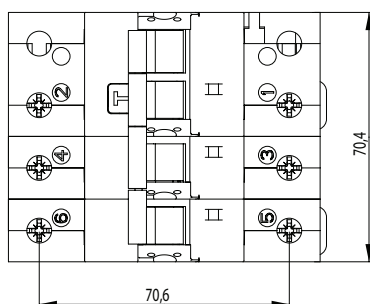


## RCBO 6kA 4 module 4-pole B or C - characteristic

Residual current circuit breaker with integral overcurrent protection. It is a 'Type A' RCBO and breaks on all 4 poles. It is capable of protecting the system against short-circuit current up to 6kA.

Part numbers: RCBOGSB..., RCBOGSC...

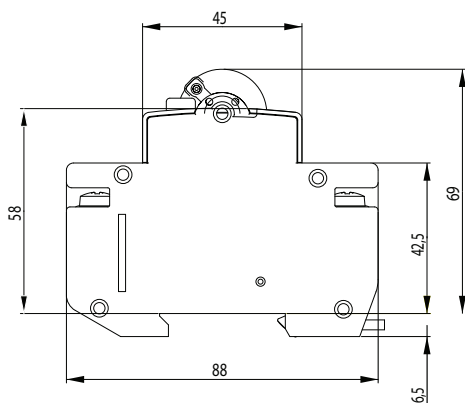

### Technical data

Rated voltage $U_n$	~ 400V AC
Rated current $I_n$	6 - 32A
Rated frequency $f_n$	50/60 Hz
Rated short-circuit capacity	6 kA
Back-up fuse	100A gG
Tripping characteristic	B, C
Type	A
Rated residual current $I_{\Delta n}$	30 mA
Rated residual making & breaking capacity $I_{\Delta n}$	4,500A
Terminals	1-25mm <sup>2</sup> , max. 3Nm
Width	72 mm
Standards	EN 61009 - 1