

# SENECA SURFACE

Dedicated LED emergency fittings for surface mounting



### APPLICATIONS

- Corridors
- Escape routes

### CONSTRUCTION

- Moulded polycarbonate body construction
- Acrylic lens
- 3 x NiCd 3.6V, 3,000 mAh cells

### TECHNICAL DETAILS

- 2W, 104 lm, 52 l.lm/c.W
- Non-maintained operation
- Choice of two lenses for different light distributions:
  - Wide, giving a circular distribution
  - Oval, giving an oval light distribution. (Suffix OVAL)
- Momentary manual test button fitted

### OPTIONS


- WIDE** For wide (circular) light distribution, no suffix required.
- OVAL** For oval (corridor) light distribution, use suffix OVAL.

### PLEASE NOTE THAT:

- Because the frequency of charge & discharge is beyond NVC's control, batteries are excluded from the 5 year warranty on this product
- NiCd cells will not perform well below 0°C



### WIDE VERSION

Light distribution 360° symmetric. Suitable for open areas.



### OVAL VERSION

Light distribution elongated in one dimension, short in the other. Suitable for corridors.

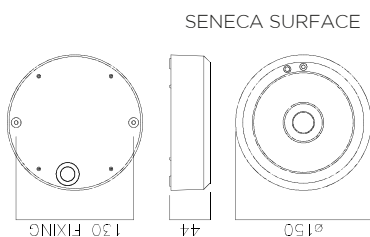

ORDER CODE	DESCRIPTION
NSC2/LED/SURF/NM3	SENECA 2W LED NON-MAINTAINED SURFACE MOUNT
NSC2/LED/SURF/OVAL/NM3	SENECA 2W LED NON-MAINTAINED SURFACE MOUNT OVAL DIST