

SYRACUSE

Self contained, non-maintained LED emergency fitting. A cost effective, versatile and energy efficient alternative to M3 operation in recessed modular fittings and stand-alone bulkheads



SYRACUSE 5W

SYRACUSE 3W



APPLICATIONS

- Corridors
- Offices
- Hotels, entertainment and leisure

CONSTRUCTION


- Battery pack and driver in separate cylindrical cases
- Supplied with clips for recessed mounting fitted

TECHNICAL DETAILS

- 3 hours operation on battery power after mains power failure
- Non-maintained operation
- 3W - 3.6V, 3,000mAh
- 5W - 3.6V, 4,500mAh
- NiCd cells
- For recessed installation

OPTIONS

BEZELS Supplied with silver bezel as standard. For white bezel use suffix WH.

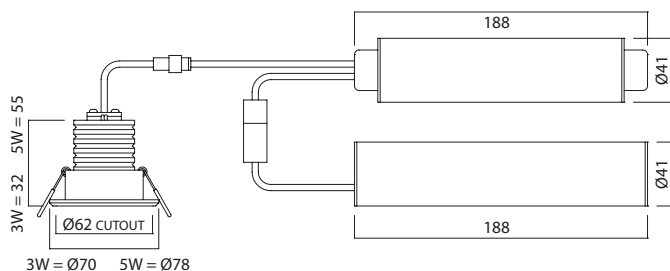

PLEASE NOTE THAT:
 - Because the frequency of charge & discharge is beyond NVC's control, batteries are excluded from the 5 year warranty on this product
 - NiCd cells will not perform well below 0°C

ORDER CODE	DESCRIPTION
NSY3/LED/NM3	SYRACUSE 3W LED NON-MAINTAINED DOWNLIGHT
NSY5/LED/NM3	SYRACUSE 5W LED NON-MAINTAINED DOWNLIGHT
NSY3/LED/WH/NM3	SYRACUSE 3W LED NON-MAINT DOWNLIGHT WHITE BEZEL
NSY5/LED/WH/NM3	SYRACUSE 5W LED NON-MAINT DOWNLIGHT WHITE BEZEL