



## **AAXLED/90/WW**

Axiom Rigid LED Strip Warm White 12W Silver Grey



## **Features**

Ultra slim profile rigid linkable LED strip.

Suitable for continuous illumination to a maximum of 5 metres.

Protective front cover.

Supplied with metal flush fixing clips.

LED lifespan L70 40,000 hours.

## General Information

|                     |  |
|---------------------|--|
| Lamp Type           | LED  |
| Colour / Finish     | Silver Grey  |
| IP Rating           | IP20   |
| Class Protection    | 3  |
| Internal / External | Internal   |
| Warranty (Years)    | 2  |
| CE Mark             | Yes  |
| Height / Depth      | 12   |
| Length / Diameter   | 900  |
| Width               | 20   |
| Accessories         | AAXLED/ML, AAXLED/250LL, AAXLED/500LL, AAXLED/1000LL, AD30W/12V, AD75W/12V, ADDIM75W/12V |


## Technical Information

|                  |               |
|------------------|---------------|
| Wattage          | 12W           |
| Lumens Delivered | 830lm         |
| Lm/W             | 69 Lm/W       |
| CRI              | Ra 60         |
| CCT              | 3000K         |
| Input            | 12V DC        |
| Hertz            | 50/60Hz       |
| Operating Temp   | -20°C to 45°C |

## Technical Data - ETIM 6 - Ceiling-/wall luminaire (EC002892)

|  |                      |
|--|----------------------|
| Suitable for suspended mounting        | No                   |
| Lamp type                              | LED not exchangeable |
| With light source                      | Yes                  |
| Lamp holder                            | None                 |
| Colour housing                         | Grey                 |
| Voltage type                           | DC                   |
| Nominal voltage                        | 12-12 V              |
| Control gear included                  | No                   |
| Degree of protection (IP)              | IP20                 |
| Protection class                       | III                  |
| Rated luminous flux acc. IEC 62722-2-1 | 830 lm               |
| Colour of light                        | White                |
| Colour temperature                     | 3000-3000 K          |
| Colour rendering index CRI             | 60-69                |
| Length                                 | 900 mm               |
| Width                                  | 20 mm                |
| Lamp power                             | 12 W                 |
| Lamp power at multiwatt                | Not applicable       |
| Suitable for emergency lighting        | No                   |
| Emergency unit integrated              | No                   |
| Suitable for built-in mounting         | No                   |
| Suitable for surface mounting          | Yes                  |
| With light sensor                      | No                   |
| With movement sensor                   | No                   |
| Max. system power                      | 12 W                 |

|                                       |           |
|---------------------------------------|-----------|
| Type of grid                          | None      |
| Reflector                             | None      |
| Light sharing                         | Symmetric |
| Light outlet                          | Direct    |
| Height/depth                          | 12 mm     |
| Ambient temperature                   | -20-45 °C |
| Suitable for light line configuration | Yes       |

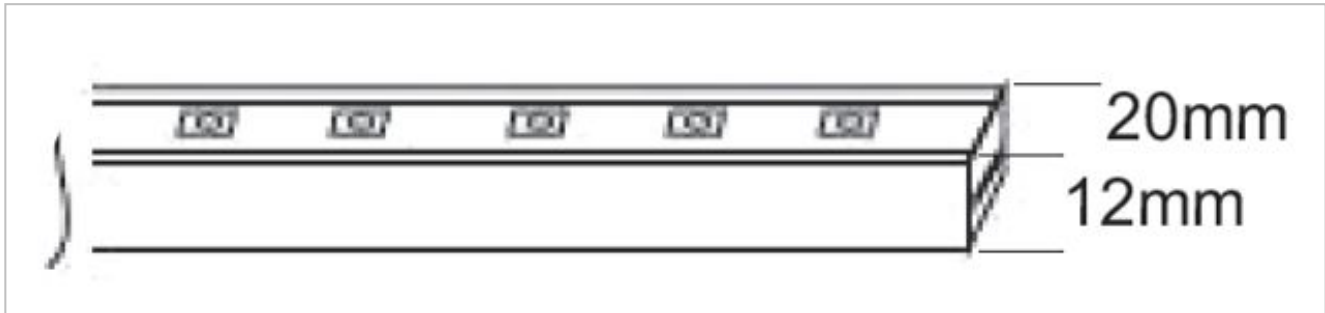

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:13 PM