



AFRLED230/CW

Freska LED Downlight Cool White 19W White



Features

Economic ultra-slim circular LED downlight.

Ideal for use in areas with shallow ceiling void.

Remote driver with plug and play connection.

Edge lit providing excellent uniform illumination.

19W comparable performance to 26W PLC.

LED lifespan L70 40,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP44
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	2
CE Mark	Yes
Height / Depth	25
Length / Diameter	240
Accessories	AFRLED/M3/ST


Technical Information

Wattage	19W
Lumens Delivered	1208lm
Lm/W	64 Lm/W
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C

Technical Data - ETIM 6 - Downlight rigid/swivelling (EC001702)

Suitable for wall mounting	No
Suitable for suspended mounting	No
Lamp type	LED not exchangeable
With light source	Yes
Colour housing	White
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Control gear included	Yes
Type of dimming	Not dimmable
Degree of protection (IP)	IP44
Protection class	II
Rated luminous flux acc. IEC 62722-2-1	1208 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Outer diameter	240 mm
Lamp power at multiwatt	Not applicable
Emergency unit integrated	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Adjustability	Not adjustable
Suitable for lamp power	19-19 W
With light sensor	No

With movement sensor	No
Max. system power	19 W
Height/depth	25 mm
Ambient temperature	-20-40 °C

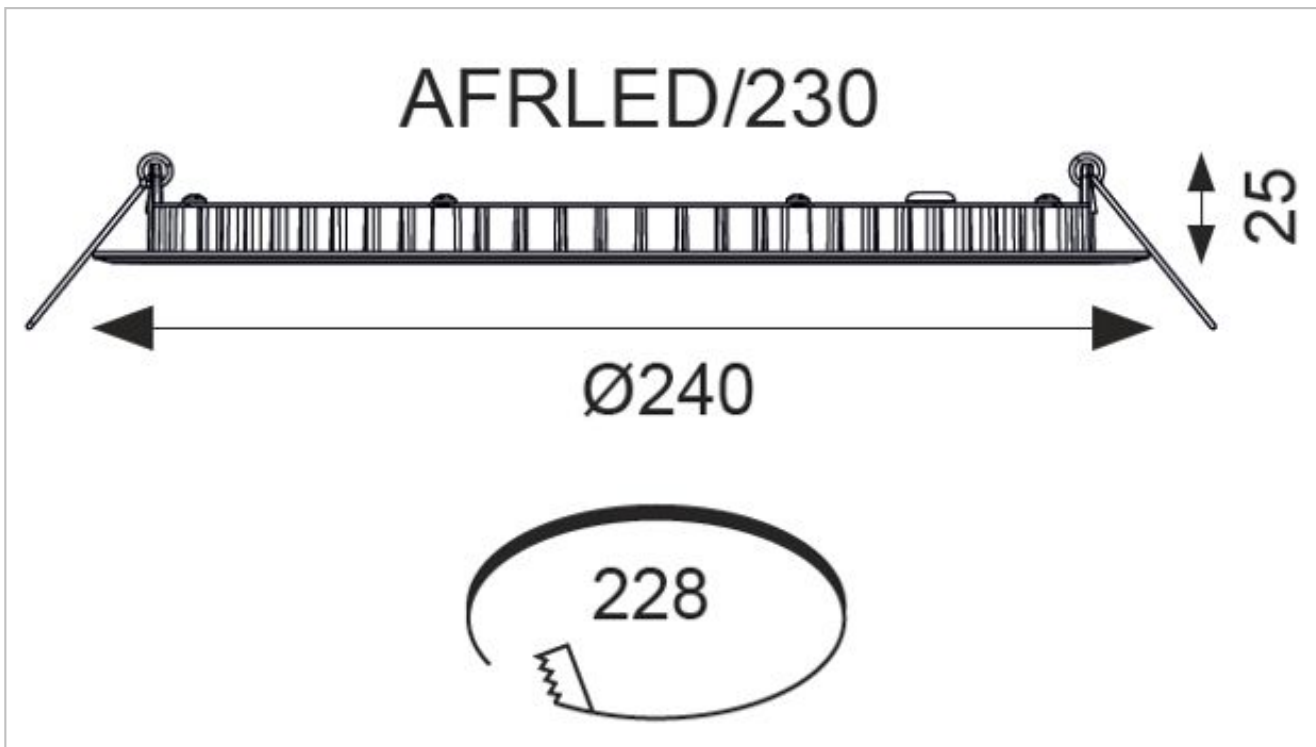

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:12 PM