

## GX6 & GXC6

150mm (6") AC axial extract fans



### The Range

Xpelair GX models are purpose designed for use in kitchens and utility rooms and can be window or panel mounted as supplied, or wall mounted using an optional wall kit.

GXC models have an integral pullcord actuator. Timer and humidistat versions are also available, along with multi-speed models. A trickle ventilation facility is available for background ventilation when not in use.

### Key Features

- Single and two speed axial extract fans
- Two speed model operation requires COS switch accessory
- GX models silent electro-thermal actuated shutter remotely switched
- GXC pullcord operated with mechanical louvred backdraught shutter
- Remote switched, pullcord, timer and humidistat control model options
- Lubricated for life motors with thermal cut-out protection
- Clip-off front cover for ease of cleaning
- BEAB approved

### Dimensions (mm)

A	B	C	D	E	F	ØG	H	J	K
226	210	119	107	109	101	184/203	32	4-35	113

### Ancillaries

See pages 72-87

### Models

#### GX6

Ref. 90800AW

Single speed extract fan | Operated by remote switch or sensor (not supplied)

#### GX6T

Ref. 90812AW

Single speed extract fan | Integral run-on timer (adjustable from 2-20 mins) operated by lighting circuit

#### GX6HT

Ref. 90814AW

Single speed extract fan | Integral automatic humidistat operation adjustable between 50-90% RH | Integral run-on timer operated by the lighting circuit | Timer adjustable from 2-20 mins

#### GX6HT2

Ref. 90863AW

Two speeds and humidistat or manual control selectable using an Xpelair TBS control (not supplied) | Silent electrothermal shutter | Automatic humidistat operation adjustable between 50-90% RH | Integral run-on timer operated by room lighting circuit | Timer adjustable from 2-20 mins

#### GXC6

Ref. 90850AW


Single speed extract fan | Integral pullcord switches fan on and opens shutter

#### GXC6T

Ref. 90861AW

Single speed extract fan | Integral pullcord switches fan on and opens the shutter | Pullcord off action actuates timer overrun

### Dimensions (mm)

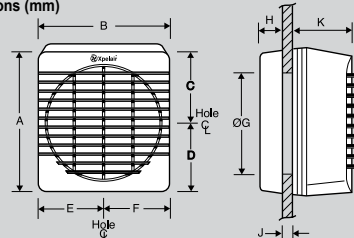

Product Selector		GX6	GX6T	GX6HT	GX6HT2	GXC6	GXC6T
Reference number		90800AW	90812AW	90814AW	90863AW	90850AW	90861AW
Speeds		1	1	1	2	1	1
Electrical power rating (W)		30	30	30	30	30	30
Hole diameter (mm)		184	184	184	184	184	184
Hole diameter with wall liner (mm)		203	203	203	203	203	203
Weight (kg)		1.9	1.9	1.9	1.9	1.9	1.9
UK Guarantee (years)		2	2	2	2	2	2
Extract performance (FID, m³/h)	high	266	266	266	266	266	266
	low				222		
Extract performance (FID, l/s)	high	74	74	74	74	74	74
	low				62		
Sound pressure level (dB(A)@3m)	high	37	37	37	37	37	37
	low				34		