


Description	Size (mm²)	Voltage Grade (kV)
Cu/XLPE/SWA/PVC	4X240	0.6/1 (1.2)

Applicable Standards	Application
BS EN 60228 BS 5467	For outdoor and indoor fixed installations and it's normally used for power distribution in urban networks and industrial plants. Suitable for laying underground directly or in ducts or on trays in free air.

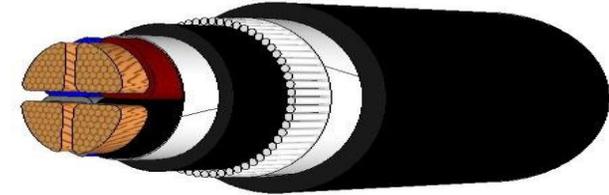

Features	Cable Identification
Conductor Operating Temp. up to 90 °C Conductor Short Circuit Temp. up to 250 °C	<p>Cores Identification Brown , Black , Grey , Blue</p> <p>Outer Sheath Color Black</p> <p>Marking Over the Outer Sheath EL SEWEDY CABLES 140/001 BASEC ELECTRIC CABLE 4X240 mm2 600/1000 V Cu/XLPE/SWA/PVC BS 5467 CE Manufacturing Year H</p>

Construction	
Conductor	Sector Shaped Stranded Compacted Copper (Class 2)
Insulation	XLPE (GP 8)
Inner Sheath	PVC
Armour	Steel Wire Armour
Outer Sheath	PVC (Type 9)

Electrical Data		
Conductor Max. DC Resistance at 20°C	0.0754	Ω/km
Conductor Max. AC Resistance at 90°C	0.0988	Ω/km
Conductor Short Circuit Current for 1 sec.	34.3	kA
Rated Current (laid in Air) *	614	A
Rated Current (laid in Duct) *	456	A
Rated Current (laid in Ground) *	579	A

General Data		
Nominal Cable Diameter	59.9	mm
Approximate Cable Weight	12010	kg/km
Minimum Bending Radius	8 × Outer Diameter	

* Air Temperature = 30 °C , Ground Temperature = 20 °C , Soil Thermal Resistivity = 1 °C.m/W , Burial Depth = 0.5 m

Testing
All routine tests required by BS 5467 will be performed on the cable and a test certificate will be supplied on request.

Packing		
Standard Cutting Length	1000 (±3%)	m
Drum Type	Steel Drum	