



# SON-T

## SON-T 70W E E27 1SL

High Pressure Sodium lamp with clear tubular outer bulb

### Product data

General Information	
Cap-Base	E27 [ E27]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life to 5% Failures (Nom)	12000 h
Life to 10% Failures (Nom)	15000 h
Life to 20% Failures (Nom)	19000 h
Life to 50% Failures (Nom)	28000 h
System Description	External Ignitor
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	97 %
LSF 16000 h Rated	92 %
LSF 20000 h Rated	84 %
Light Technical	
Color Code	220 [ CCT of 2000K]
Luminous Flux (Rated) (Nom)	6000 lm
Chromaticity Coordinate X (Nom)	540
Chromaticity Coordinate Y (Nom)	413
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (Rated) (Nom)	84 lm/W
Color Rendering Index (Max)	25
Color Rendering Index (Nom)	-

LLMF 2000 h Rated	89 %
LLMF 4000 h Rated	86 %
LLMF 6000 h Rated	85 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
LLMF 16000 h Rated	81 %
LLMF 20000 h Rated	80 %
Ratio Scotopic/Photopic Lumens	0.50

Operating and Electrical	
Power (Rated) (Nom)	70.0 W
Lamp Current (EM) (Nom)	0.98 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	1800 V
Re-Ignition Time (Min) (Max)	180 s
Ignition Time (Max)	5 s
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	90 V

Controls and Dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	5 min

# SON-T

## Mechanical and Housing

Bulb Finish	Clear
Cap-Base Information	-

## Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	16 mg
Energy Consumption kWh/1000 h	77 kWh

## Luminaire Design Requirements

Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C


## Product Data

Full product code	872790093603200
Order product name	SON-T 70W E E27 1SL
EAN/UPC - Product	8727900936032
Order code	928152800093
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928152800093
Net Weight (Piece)	0.050 kg
ILCOS Code	ST-70-H/E-E27

## Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




SON-T 70W/220 E27

Product	D (max)	O	L	C (max)
SON-T 70W E E27 1SL	36 mm	42 mm	102 mm	156 mm

## Photometric data

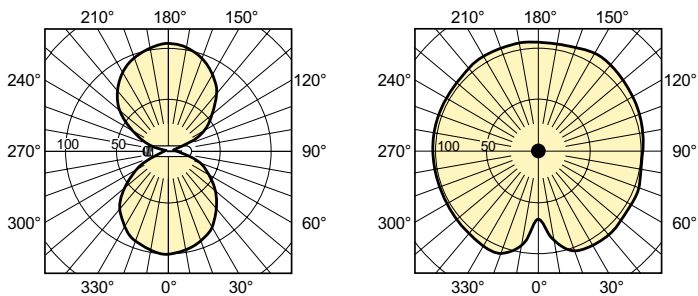



SON-T

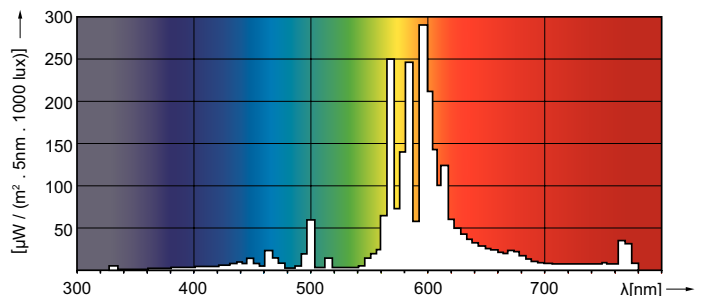

SON-T

# SON-T

## Lifetime

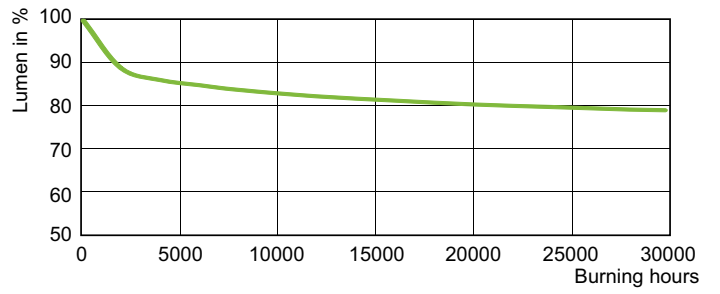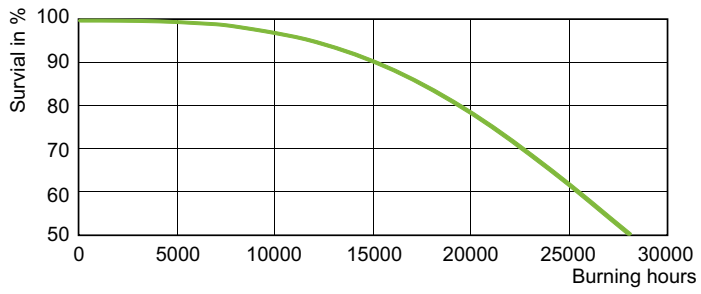

SON-T 70 W Life Expectancy

SON-T 70 W Lumen Maintenance

