



# HPI-T High Wattage

## HPI-T 1000W/543 E40 1SL/4

Quartz metal halide lamps with clear outer bulb

### Product data

General Information	
Cap-Base	E40 [ E40]
Operating Position	P [ Parallel or Horizontal(HOR)]
Life to 5% Failures (Nom)	3000 h
Life to 10% Failures (Nom)	5500 h
Life to 20% Failures (Nom)	8000 h
Life to 50% Failures (Nom)	12000 h
System Description	-
Light Technical	
Color Code	543 [ CCT of 4300K]
Luminous Flux (Rated) (Min)	79000 lm
Luminous Flux (Rated) (Nom)	85000 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	87 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	370
Chromaticity Coordinate Y (Nom)	380
Correlated Color Temperature (Nom)	4300 K
Luminous Efficacy (Rated) (Nom)	86 lm/W
Color Rendering Index (Nom)	57
Operating and Electrical	
Lamp supply voltage	220 V [ 220]

Power (Rated) (Nom)	985.0 W
Lamp Current Run-Up (Max)	14.2 A
Lamp Current (EM) (Nom)	8.25 A
Ignition Supply Voltage (Max)	198 V
Ignition Supply Voltage (Min)	198 V
Ignition Time (Max)	30 s
Voltage (Max)	140 V
Voltage (Min)	120 V
Voltage (Nom)	130 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Clear

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	86 mg
Energy Consumption kWh/1000 h	1084 kWh

Luminaire Design Requirements	
Bulb Temperature (Max)	555 °C
Cap-Base Temperature (Max)	300 °C

## HPI-T High Wattage

### Product Data


Full product code	692059027282000
Order product name	HPI-T 1000W/543 E40 1SL/4
EAN/UPC - Product	6920590272820
Order code	928482600093
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	4
Material Nr. (12NC)	928482600093
Net Weight (Piece)	0.430 kg

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing



Product	D (max)	O	L	C (max)
HPI-T 1000W/543 E40 1SL/4	66 mm	80 mm	240 mm	382 mm

HPI-T 1000W/543 E40



### Photometric data

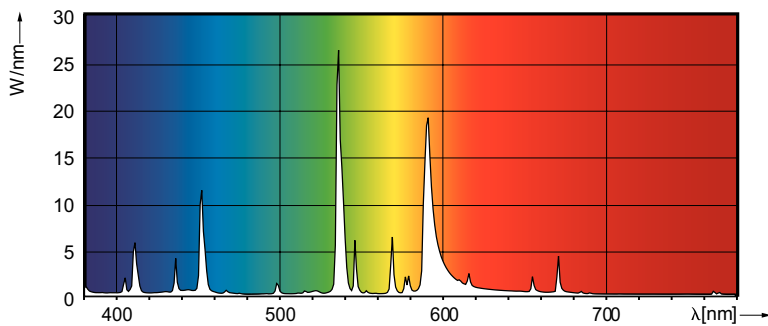

HPI-T

# HPI-T High Wattage

## Lifetime

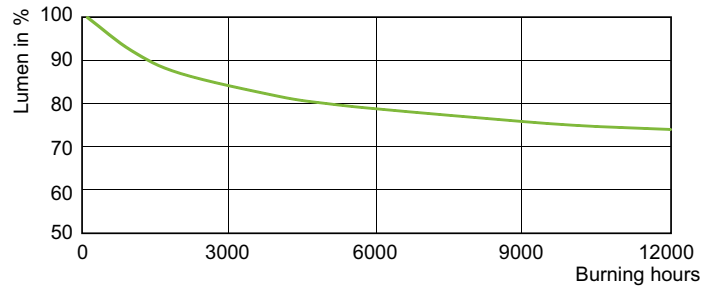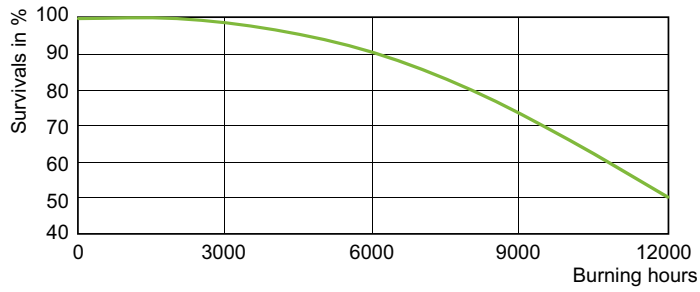

HPI-T 1000 W Life Expectancy

HPI-T 1000 W Lumen Maintenance

