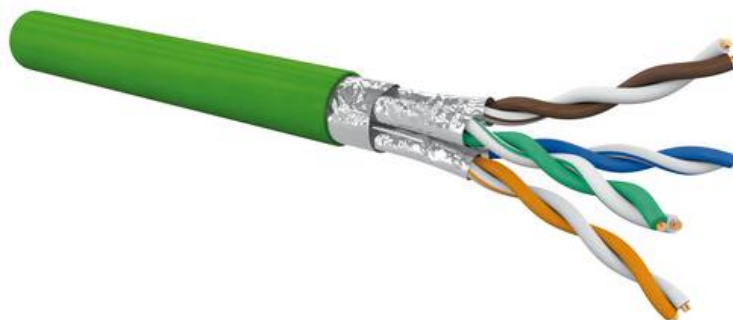


**CAT6A 4P F/FTP B2ca AWG23 green cable (500 m drum)****GGM C6AFF4PFRBT5****ENSURE Fire Safety inside Buildings !**

- Available on 500 m drum
- Standards:
 - ISO/IEC 11801 Ed.2.2
 - EN 50173-1, EN 50173-2 et EN 50173-5
 - ISO/IEC 24764
 - IEC 61156-5 : Edition 2.0 2009-02,
 - ANSI/TIA-568-C.2
- Jacket: Green RAL6018
- Overall diameter: 7 mm
- Insulation diameter: 1.38 mm
- Frequency range: from 0 to 500 MHz
- Characteristic impedance: 100 ?
- Overall foil with Al-laminated plastic foil on each pairs with drain wire (F/FTP)
- LSHF-FR (IEC 61034, IEC 60754 & IEC 60332-3)
- Fire behaviour :
 - EN50575 : B2ca s1, d1, a1
 - EN50399
 - IEC 60332-1
 - IEC 60754-2
 - IEC 61034
- Nominal velocity of propagation: 78 %
- Conductor bare copper wire, AWG23