

CLEVELAND

Polycarbonate IP65 weather-proof LED fittings



APPLICATIONS

- Industry, garages & workshops
- Food preparation areas
- Resistant to impact and many chemical agents, but for suitability in specific environments please take specialist advice.

CONSTRUCTION


- Polycarbonate base and opal diffuser
- Grade 316 stainless steel clips
- Aluminium heat-sink
- Stainless steel surface mounting clips
- Can also be suspended from wire/chain using clips provided

TECHNICAL DETAILS

- Single & twin rows of SMD LEDs on metal core PCB
- **1250mm (4ft)**
 - Single 24W, 2,715 lm, 113 l.lm/c.W
 - Twin 40W, 4,600 lm, 115 l.lm/c.W
- **1550mm (5ft)**
 - Single 35W, 3,875 lm, 110 l.lm/c.W
 - Twin 57W, 6,600 lm, 114 l.lm/c.W
- CRI >80
- CCT 4000K
- Low flicker LED driver
- PF >.95

OPTIONS

EMERGENCY Available on all versions. Add Suffix M3.

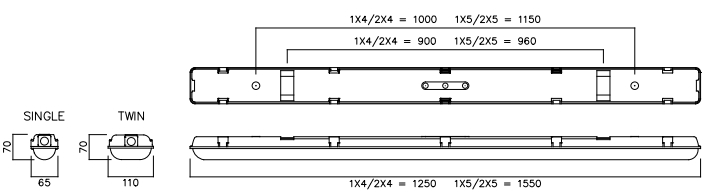

ORDER CODE	DESCRIPTION
NCV1X4/840	CLEVELAND LED SINGLE 4FT 4000K IP65 NON CORROSIVE
NCV2X4/840	CLEVELAND LED TWIN 4FT 4000K IP65 NON CORROSIVE
NCV1X5/840	CLEVELAND LED SINGLE 5FT 4000K IP65 NON
NCV2X5/840	CLEVELAND LED TWIN 5FT 4000K IP65 NON CORROSIVE