

1897 Rodio - COB symmetric

Housing: in die-cast aluminium with cooling fins.

Reflector: symmetric in pressed prismatic aluminium, anodised and polished for higher luminous efficiency.

Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

On request, coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. 2200K - AMBER (sub-code -73)


Equipment: external connector for quick installation. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Power factor: 0,9.

Photobiological risk: exempt, pursuant to EN62471.

Low flicker Luminous flux maintenance 80%: 50.000h (L80B20). Wind surface: L:390cm² F:1420cm².

Download

DXF 2D
- 1897.dxf
3DS
- disano_1897_rodio.3ds
3DM
- disano_1897_rodio.3dm
Montaggi
- Rodio.pdf

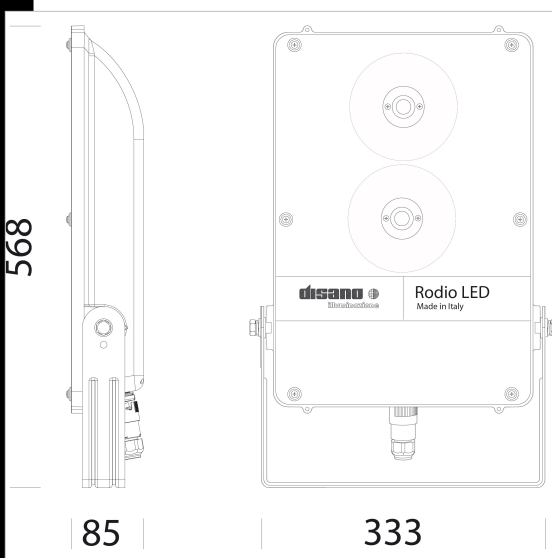

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414820-00	CLD CELL	5.58	LED COB-9831lm-4000K-CRI 80	79 W	GRAFITE
414821-00	CLD CELL	5.50	LED COB-12308lm-4000K-CRI 80	103 W	GRAFITE
414822-00	CLD CELL	5.61	LED COB-15802lm-4000K-CRI 80	129 W	GRAFITE
414820-39	CLD CELL	5.49	LED COB-9340lm-3000K-CRI 80	79 W	GRAFITE
414821-39	CLD CELL	5.52	LED COB-11693lm-3000K-CRI 80	103 W	GRAFITE
414822-39	CLD CELL	5.49	LED COB-14854lm-3000K-CRI 80	129 W	GRAFITE
414823-00	CLD CELL	6.42	LED COB-23245lm-4000K-CRI 80	195 W	GRAFITE

Accessories



- 333 pole mounting diam.60



- 334 pole mounting diam. 76



- 350 protection guard

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated