

# SENECA SURFACE

Dedicated LED emergency fittings for surface mounting



WITH OVAL LENS FITTED

**LITHIUM**  
IRON PHOSPHATE



SENECA SURFACE COMES WITH BOTH WIDE AND OVAL LENSES WHICH TWIST AND LOCK IN POSITION



WITH WIDE LENS FITTED



SCAN FOR DIGITAL COPY

## APPLICATIONS


- Corridors
- Escape routes

## CONSTRUCTION

- Moulded polycarbonate body construction
- Acrylic lens
- Lithium Iron Phosphate (LiFePO<sub>4</sub>) 3.2V 3000mAh battery (not suitable for use below 0°C)


## TECHNICAL DETAILS

- 186 lumens
- Non-maintained operation
- Choice of two lenses for different light distributions:
  - **Wide**, giving a circular distribution
  - **Oval**, giving an oval light distribution.
- Momentary manual test button fitted
- Self-test version, compliant with BS5266

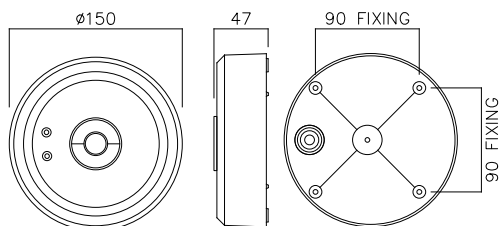


### WIDE VERSION

Light distribution 360° symmetric. Suitable for open areas.



### OVAL VERSION

Light distribution elongated in one dimension, short in the other. Suitable for corridors.



| ORDER CODE     | DESCRIPTION   |
|----------------|---|
| NSC/SURF/NM3   | Seneca LED Non-Maintained 3Hr Surface Mount           |
| NSC/SURF/STNM3 | Seneca LED Non-Maintained 3Hr Surface Mount Self Test |