

# CLEVELAND

Polycarbonate IP65 weather-proof LED fittings



SCAN FOR  
DIGITAL COPY

## APPLICATIONS

- Industry, garages & workshops
- Food preparation areas
- Resistant to impact and many chemical agents, but for suitability in specific environments please take specialist advice.

## CONSTRUCTION


- Polycarbonate base and opal diffuser
- Grade 316 stainless steel clips
- Aluminium heat-sink
- Stainless steel surface mounting clips
- Can also be suspended from wire/chain using clips provided

## TECHNICAL DETAILS

- Single & twin rows of SMD LEDs on metal core PCB
- **1250mm (4ft)**
  - Single 23W, 2915 lm, 125 l.lm/c.W
  - Twin 38W, 4845 lm, 126 l.lm/c.W
- **1550mm (5ft)**
  - Single 36W, 3935 lm, 109 l.lm/c.W
  - Twin 57W, 6615 lm, 116 l.lm/c.W
- **1850mm (6ft)**
  - Single 47W, 5380 lm, 114 l.lm/c.W
  - Twin 79W, 9194 lm, 115 l.lm/c.W

## TECHNICAL DETAILS (contd.)

- CRI >80
- CCT 4000K
- ENEC approved flicker free driver
- Emergency maintained 3 hours version available for all sizes, as listed

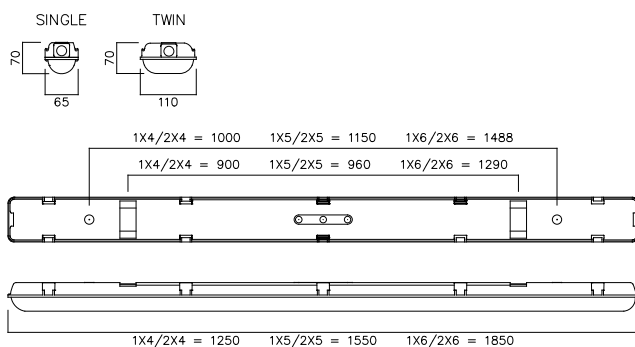

ORDER CODE	DESCRIPTION
NCV1X4/840	Cleveland LED Single 4Ft IP65 Non Corrosive 840
NCV1X4/M3/840	Cleveland LED Single 4Ft IP65 Non Corrosive M3 840
NCV1X5/840	Cleveland LED Single 5Ft IP65 Non Corrosive 840
NCV1X5/M3/840	Cleveland LED Single 5Ft IP65 Non Corrosive M3 840
NCV1X6/840	Cleveland LED Single 6Ft IP65 Non Corrosive 840
NCV1X6/M3/840	Cleveland LED Single 6Ft IP65 Non Corrosive M3 840
NCV2X4/840	Cleveland LED Twin 4Ft IP65 Non Corrosive 840
NCV2X4/M3/840	Cleveland LED Twin 4Ft IP65 Non Corrosive M3 840
NCV2X5/840	Cleveland LED Twin 5Ft IP65 Non Corrosive 840
NCV2X5/M3/840	Cleveland LED Twin 5Ft IP65 Non Corrosive M3 840
NCV2X6/840	Cleveland LED Twin 6Ft IP65 Non Corrosive 840
NCV2X6/M3/840	Cleveland LED Twin 6Ft IP65 Non Corrosive M3 840