

# LED BACKLIT PANEL RANGE

2751411 2751412



Kellihers Electrical  
REXEL GROUP



## LED Recessed Panel

### APPLICATIONS


- Versatile fitting which is suitable for a wide range of applications such as offices, shops, reception areas, restaurants, hotels, schools & hospitals

### SPECIFICATION

- LED alternative for T8 LED fluorescent lay-in modular fittings
- Fits into standard size ceiling grid of 15mm to 24mm
- Emergency options available
- Suitable for switching by PIR, Microwave sensor or photocell
- Triple E approved
- Flicker free driver

### TECHNICAL DETAILS

- Efficacy- 104 lm/cw to 105 lm/cw
- CRI 80
- IP20 Rating
- CCT 4000K

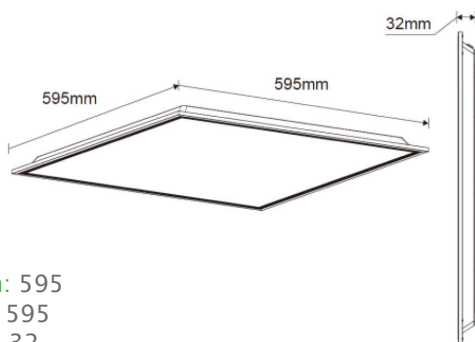

Length: 595  
Width: 595  
Depth: 32

Code	Description	Wattage (W)	Warranty (yrs)	Lifetime (hrs)	Lumens (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Beam Angle
2751411	600 X 600 Backlit Panel	40w	5 years	50,000hrs	4100lm	102lms/Cw	4000k	80	110
2751412	600 x 600 UGR<19 Backlit Panel	38w	5 years	50,000hrs	4000lm	105lms/CW	4000k	80	110