LUMINAIRE WITH BRACKET YORK 4600

10.14410.0V035 LEVO3 53W SKI (4000K)/O3

.hess

Luminaire with bracket YORK 4600
1 luminaire York 4600
Housing constructed of aluminium incl. bracket
Overhanging total 595 mm
Clear printed single pane, tempered safety glass cover
Spigot ø 76,1 mm
Light distribution: Asymmetrical, optimised for illuminance
(Characteristic: For main road illumination)
Elec. equip.: LED LEVO3 O3 approx. 53W (4000K)
With electronical ballast (220-240V/50-60Hz)
- with CLM (350-500mA, 37-53W)
- without CLM (500mA, 53W)
Ingress protection IP66, protection rating I
Following versions are available:
Without dimming and without CLM
(luminous output degradation compensation)
Or with dimming via DALI, StepDim or AstroDim
AND/OR with CLM (please specify on your purchase order!)
Colour: DB 703 or all RAL- (classic- single shades),
Hess-DB and Hess-Glimmer-colours.
RAL pearl-mica-metallic-shades on request.

Technical data
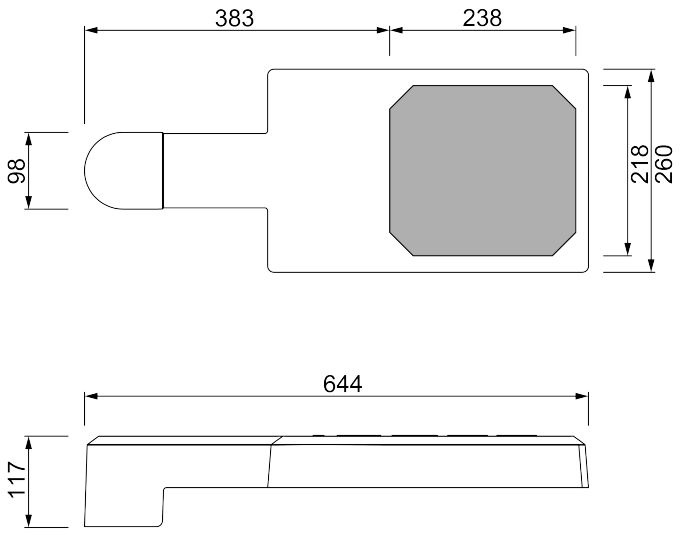
Ingress protection	IP66
Safety class	I
ULOR	0%
IK-Value	IK07
LED Lifetime	L80 B10 / 85.000h - TA <= 25°C L70 B10 / 50.000h - TA >25 - <=50°C
Rated input power	53 W
Width [mm]	255
Height [mm]	60
Length [mm]	640
Area exposed to wind	0,05 m²