

## Luthor Big - Professional

The range of Luthor recessed spotlights is expanded with three sizes. This enables to fit the spotlights in all fitting holes of the same line of products. Luthor adjustable recessed LED spotlights offer technologically advanced light and are a very solid product with high quality and high performance to illuminate large commercial spaces.

Housing adjustable Big: in die cast aluminium

Reflector: In coated, oxidised and high yield polished aluminium.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


Power factor:  $\geq 0.95$

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

fitting holes 170mm to 190mm

22088812-xx / 22088813-xx: class I

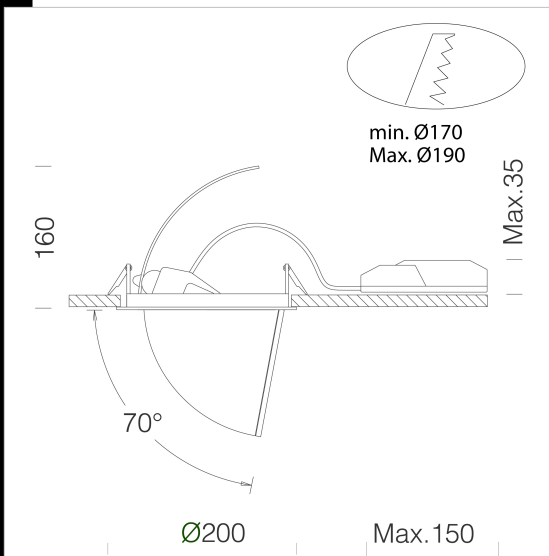


Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22087814-00	CLD	1,50	LED COB-2468lm-3000K-23°-CRI 92	27 W	WHITE
22088816-00	CLD	1,53	LED COB-2640lm-4000K-23°-CRI 92	27 W	WHITE
22087815-00	CLD	1,50	LED COB-2539lm-3000K-56°-CRI 92	27 W	WHITE
22087817-00	CLD	1,50	LED COB-2593lm-4000K-56°-CRI 92	27 W	WHITE
22088810-00	CLD	1,70	LED COB-3808lm-3000K-56°-CRI 92	39 W	WHITE
22088811-00	CLD	1,70	LED COB-4008lm-4000K-56°-CRI 92	39 W	WHITE
22088812-00	CLD	1,51	LED COB-4574lm-3000K-56°-CRI 92	45 W	WHITE
22088814-00	CLD	1,80	LED COB-4717lm-4000K-56°-CRI 92	45 W	WHITE
22088815-00	CLD	1,80	LED COB-4807lm-3000K-56°-CRI 92	54 W	WHITE
22088813-00	CLD	1,53	LED COB-5534lm-4000K-56°-CRI 92	54 W	WHITE
22087814-1241	CLD-D-D	1,55	LED COB-2468lm-3000K-23°-CRI 92	27 W	WHITE
22088816-1241	CLD-D-D	1,53	LED COB-2640lm-4000K-23°-CRI 92	27 W	WHITE
22087815-1241	CLD-D-D	1,47	LED COB-2539lm-3000K-56°-CRI 92	27 W	WHITE
22087817-1241	CLD-D-D	1,60	LED COB-2593lm-4000K-56°-CRI 92	27 W	WHITE
22088810-1241	CLD-D-D	1,54	LED COB-3808lm-3000K-56°-CRI 92	40 W	WHITE
22088811-1241	CLD-D-D	1,50	LED COB-4008lm-4000K-56°-CRI 92	39 W	WHITE
22088812-1241	CLD-D-D	1,54	LED COB-4574lm-3000K-56°-CRI 92	45 W	WHITE
22088814-1241	CLD-D-D	1,51	LED COB-4717lm-4000K-56°-CRI 92	45 W	WHITE
22088815-1241	CLD-D-D	1,53	LED COB-4807lm-3000K-56°-CRI 92	54 W	WHITE
22088813-1241	CLD-D-D	1,56	LED COB-5534lm-4000K-56°-CRI 92	54 W	WHITE

### Accessori



- EM Kit O

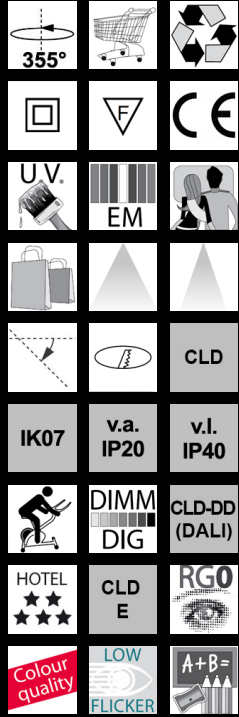

### Download

DXF 2D  
- lubig.dxf

Montaggi  
- LUTHOR rev8.pdf

BIM  
- Luthor Big - Professional -  
20201005.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated