



ABELED/WV

Beta LED 5W White



Features

Multi-purpose compact surface LED bulkhead.

IP44 rating and suitable for bathroom use.

All polycarbonate construction.

Comparable performance to 100W GLS and outperforms 16W CFL equivalents.

Instant light output and unlimited switching.

LED lifespan L70 56,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP44
Class Protection	1
Bathroom Zone	2
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Height / Depth	70
Length / Diameter	160


Technical Information

Wattage	5W
Lumens Delivered	436lm
Lm/W	87 Lm/W
CRI	Ra 70
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C

Technical Data - ETIM 6 - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
With light source	Yes
Material housing	Plastic
Colour housing	White
Material cover	Plastic, opal
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Control gear included	Yes
Type of dimming	Not dimmable
Degree of protection (IP)	IP44
Protection class	I
Rated luminous flux acc. IEC 62722-2-1	436 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	70-79
Length	160 mm
Width	160 mm
Lamp power	5 W
Lamp power at multiwatt	Not applicable
Suitable for emergency lighting	No
Emergency unit integrated	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No

Suitable for surface mounting	Yes
With light sensor	No
With movement sensor	No
Max. system power	5 W
Type of grid	None
Light outlet	Direct
Height/depth	70 mm
Ambient temperature	0-25 °C
Suitable for light line configuration	No

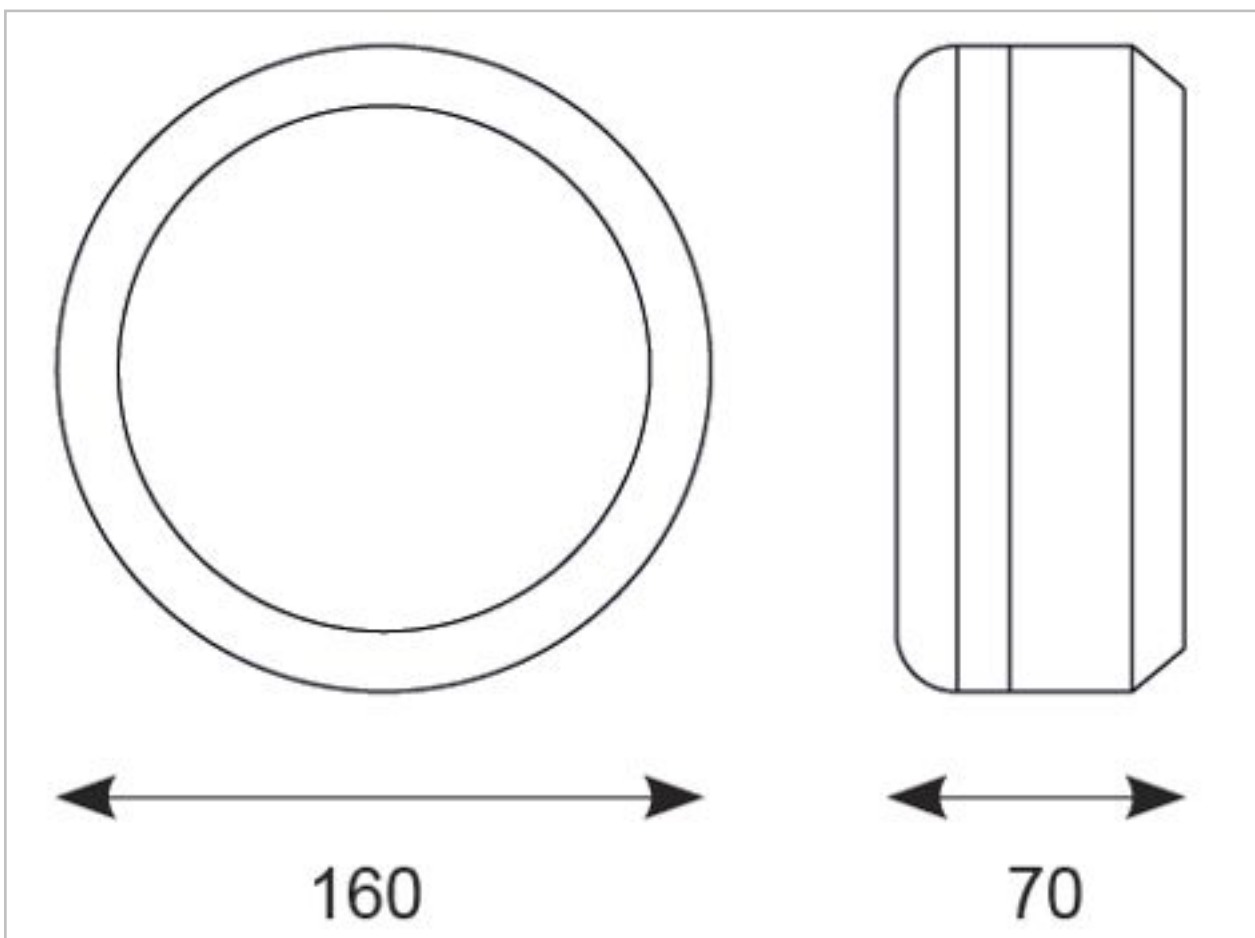

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:14 PM