



Lamp Options

- 12 high output white LEDs.
- Lamp colour - 5000K.
- Lamp power - 0.6W
- 70 lumens in emergency

Materials

- Body - powder coated sheet steel.
- Panel - flame retardant opal ABS plastic.
- Batteries (self-contained) - 3.6V 1.8A/h.

Installation notes

- Suitable for wall mounting.
- 20mm cable entry on side of unit.
- 20mm cable entry on rear of unit.
- Dimensions 423mm L x 60mm D x 200mm H.
- Supplied complete with LED lamp source.

Colours



white

EXIT sign legend options



ISO 7010



EDF



ENG/ARABIC

The EB LED EXIT sign luminaire is a cost effective, versatile and unobtrusive directional sign product. Designed to satisfy statutory requirements for Exit Signs using panels selected from the comprehensive range of types available, which will correctly indicate the direction of the escape route. The housing provides down light through a carefully designed panel in the lower surface of the luminaire to assist in the illumination of the emergency escape route.

- Competitively priced, LED EXIT sign.
- Easy to install and maintain.
- Available in self-contained versions.
- Integrated down-lighter.
- IP20 as standard.
- Supplied with LED lamp.
- 36m viewing distance.
- 2 year warranty.

Options


- 230V +/-10% 50/60Hz.
- Non-Maintained 3 hour duration .
- Maintained 3 hour duration
- Colours - White RAL 9016.
- Class I.

Specification

Self-contained - to specify state the following

IP20 LED self-contained emergency EXIT sign suitable for wall mounting providing a minimum light level of 70 lumens in emergency . Complete with 20mm conduit entry points at the sides and rear and green charge LED indicator as the EB range.

Part Number _____

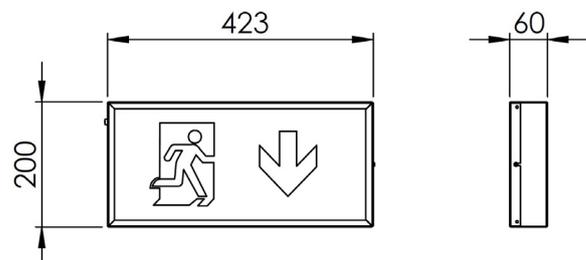

Catalogue Numbers

System Mode	Part Number	Weight (kg)
Non-Maintained 3 hour - white	EBNM3/LED	1.5
Maintained 3 hour - white	EBM3/LED	1.5



VENTILUX UNIT 2, ASHGROVE INDUSTRIAL ESTATE, KILL AVENUE, DUN LAOGHAIRE, COUNTY DUBLIN, IRELAND
 TEL +353 (0)1 214 8800 FAX +353 (0)1 280 5729 E-MAIL sales@ventilux.ie www.ventilux.ie