

Technical Data Sheet


General and Commercial Data

Product Type	Exteriors - Floodlights
Model	X-SEF LED
Code	8743
Description	X-SEF LED 50W ANTRACITE 4000K
EAN Code	8002219728852
Available colors	Anthracite RAL 7016
Application	Courtyards, Driveways Paths
Net Weight [kg]	1.75
Dimensions [mm]	221x221x71
Pieces per Pack	5



Technical Characteristics

Insulation Class	II
IP Code	65
Impact Resistance IK Rating	8
Fire resistance [⚡C]	960
Material	Die-cast aluminium
Voltage [V]	230
Frequency [Hz]	50
Power Factor (cos (φ))	0.9
Luminaire Power [W]	49
Luminaire Flux [lm]	4500
Luminous Efficacy [lm/W]	92
Range Ambient Temperature [⚡C]	-20 ÷ 40
Ballast	For constant current LED
Source	LED - CCT 4000 K - CRI 80
Average Life [h]	35000




Potenza W	Dimensioni (mm)						Peso kg
	L	B	H	L1	B1	H1	
10	126	116	49	154	134	61	0,6
20	194	154	58	184	184	69	0,85
30	194	154	58	184	184	69	0,85
50	221	221	71	221	221	82	1,75

Photometric Parameters

Measurement	8743o
CIE Code	[57,89,99,100,100]
Optics Type	Rotosymmetrical

Norms

CEI EN 60598-2-2
 CEI EN 60598-2-5
 EN 62471
 2006/95/CE
 2004/108/CE
 2009/125/CE
 874/2012/CE

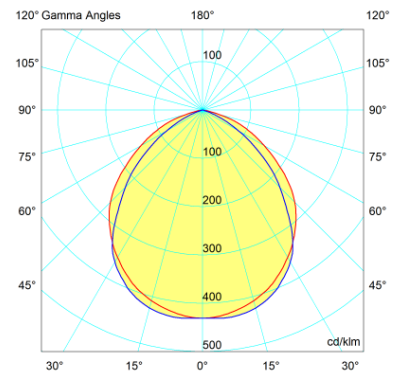

Marks

